

Description

US Digital offers a wide variety of standard linear strips. These products are available in many different resolutions and lengths. The material used is mylar polyester film. This material is very rugged with a wide temperature range of -40°C to +100°C. There is no minimum order.

The mylar linear strips have a thickness of .007" and are cut to a width of 0.700".

Mechanical alignment drawings for optical encoder linear strips and optical encoder modules are available (*see the EM1 and EM2 data sheets*)


This product is RoHS compliant.

US Digital warrants its products against defects in materials and workmanship for two years. See complete warranty for details.

Index Option

Number of inches from left side of linear strip.

Text Right Reading Index Pattern on Bottom

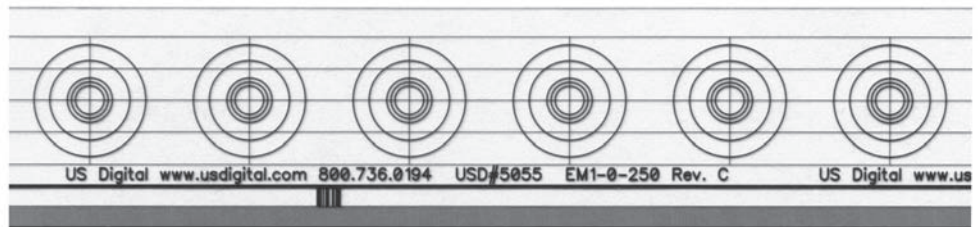

Distance to specify when ordering index pattern (to center of index pattern)

Ordering Information

LIN	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
		CPI		Length		Index
		120		1 to 35.5 (non-index)		N
		125		1 to 35.5 (index)		1 to 35
		127				
		200				
		250				
		300				
		500				
		1000				
		2000				

Quantity	Price
1	\$21.30
5	\$14.70

- Add \$2.10 per inch beyond 7"
- Add 20% for any Index option other than N (No Index) and CPI less than 1000
- Add 30% for 1000 or 2000 CPI

Order Using #LIN starting at \$21.30 per unit

Configure online at usdigital.com/products/lin