

Description

The HB5M is a hollow bore (hollow shaft / thru-bore) optical encoder with a machined aluminum enclosure and a clear anodized protective finish. The HB5M optical incremental encoder is designed to easily mount to an existing shaft to provide digital feedback information for any motion control application. The HB6M has a compliant mounting method that makes it more tolerant of radial and axial shaft runout than a standard kit encoder.

Typical applications include servo motor feedback, web process control, robotics, flux vector feedback, high power motors, textile machines and elevator controls.

The HB5M bearing style encoder features a hollow bore that accepts shaft diameters of 5mm to 8mm in diameter. The encoder slips over the shaft and is locked into place with two 4-48 set screws. A flexible anti-rotation tether compensates for shaft run out of up to 0.030" axial and 0.010" TIR. The flexible tether provides mounting for two 4-40 machine screws on a 1.812" bolt circle.

The HB5M housing comes standard with a closed cover to limit particle ingress, or an optional hole in the body to allow a shaft to pass completely through the encoder.

The mating connector is polarized and latches into the encoder. Depressing the latch tab allows the connector to be unplugged. Mating connector assemblies are available from US Digital stock. Custom cables are also readily available (see the Cables / Connectors page).

The differential version has an internal differential line driver (26C31) attached to the encoder module that can source and sink 20mA at TTL levels. The cable that connects to this encoder should have 3 twisted pairs for the data channels plus power and ground. Group each pair of differential signals. The recommended receiver is industry standard 26C32. Maximum noise immunity is achieved when the differential receiver is terminated with a 110 Ohms resistor in series with a 0.0047f capacitor placed across each differential pair. The capacitor simply conserves power; otherwise power consumption would increase by 20mA per pair, or 60mA for 3 pairs.

Related Products & Accessories


- CA-FC10-SH-FC10 10-Pin Latching / Latching Shielded Cable (Base price \$26.20)
- CA-FC10-SH-NC 10-Pin Latching / Unterminated Shielded Cable (Base price \$13.60)
- CA-FC10-W8-NC 10-Pin Latching / Unterminated 8-Wire Discrete Cable (Base price \$13.10)
- CA-FC5-SH-FC5 5-Pin Latching / Latching Shielded Cable (Base price \$16.76)
- CA-FC5-SH-NC 5-Pin Latching / Unterminated Shielded Cable (Base price \$8.88)
- CA-FC5-SS-MD6 5-Pin Latching / 6-Pin Modular Silver Satin Cable (Base price \$13.11)
- CA-FC5-W4-NC 5-pin Latching / Unterminated 4-Wire Discrete Cable (Base price \$8.38)
- CA-FC5-W5-NC 5-Pin Latching / Unterminated 5-Wire Discrete Cable (Base price \$8.38)
- CON-FC10 10-Pin Finger Latching Connector (Base price \$8.40)
- CON-FC5 5-Pin Finger Latching Connector (Base price \$3.15)



Features

- Hollow bore (hollow shaft / thru-bore) bearing design
- Rugged anodized aluminum housing
- Heavy duty ball bearings track up to 6,000 RPM
- Positive finger-latching polarized connector
- 2-channel quadrature, TTL squarewave outputs
- 3rd channel index option
- Differential line driver output option
- Tracks from 0 to 100,000 cycles/sec
- 32 to 1250 cycles per revolution (CPR)
- 124 to 5000 pulses per revolution (PPR)

 **Mechanical Drawing**

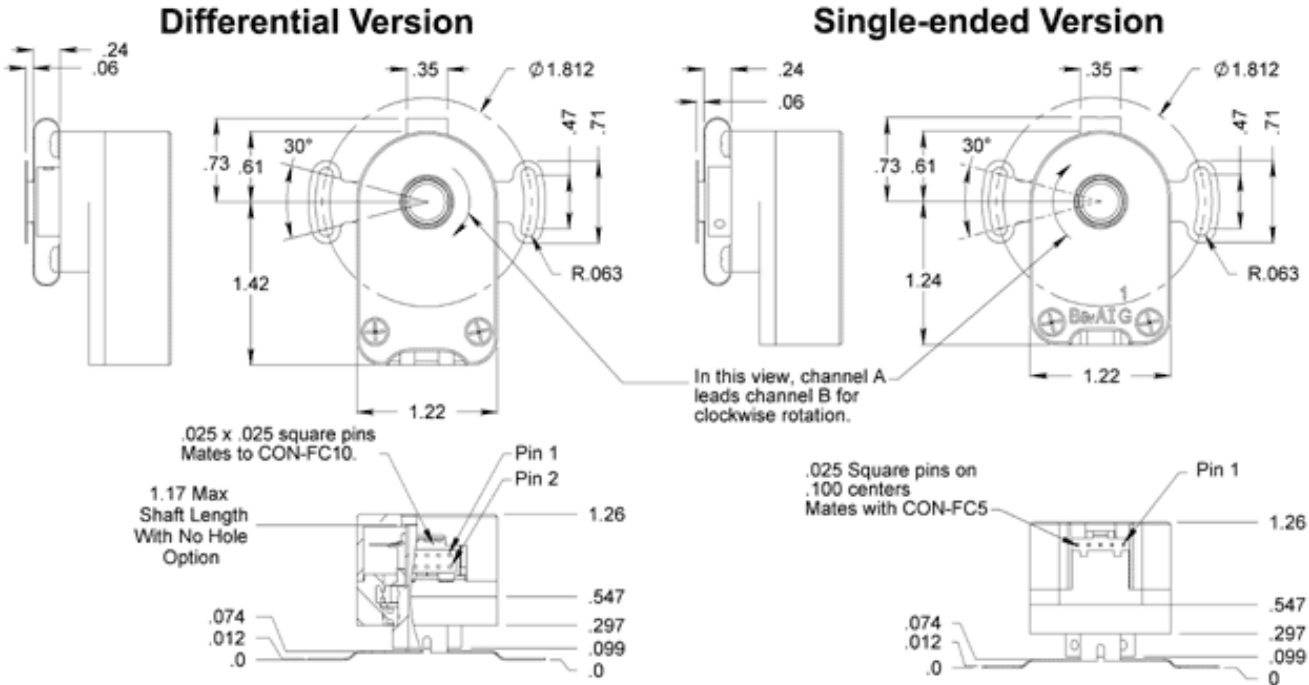

 **Mechanical**

Shaft Speed	6,000 RPM max. continuous
Acceleration	1x10 ⁵ rad/sec ²
Starting Torque	0.20 oz-in typical
Shaft Loading	2 lbs. max.
Weight	2.84 oz.
Shaft Runout	0.030" axial 0.010 TIR
Moment of Inertia	1.29x10 ⁻⁴ oz-in-sec ²
Vibration	20 g. 5 to 2KHz
Shock	50 g. @ 11mS
Operating Temperature	-20 ° C to 100 ° C

 **Phase Relationship**

A leads B in a clockwise shaft rotation, and B leads A in counterclockwise shaft rotation viewed from the rear side (opposite flexible mount) of the encoder.

 **Single-ended Electrical**

- Specifications apply over entire operating temperature range.
- Typical values are specified at $V_{cc} = 5.0V_{dc}$ and $25^{\circ}C$.
- For complete details see the EM1 and HEDS product pages.

	Supply Current	Output voltage low	Output voltage high	
Resolution	Typ / Max	Max	Min	Based on
50,96, 100, 110, 120, 192, 200, 250, 256, 360, 400, 500, 512, 540 CPR, non-index	17 / 40 mA	0.4 volts @ 3.2mA	2.4 volts @ -200uA	Low-res HEDS
1000, 1016, 1024 CPR, non-index	57 / 85 mA	0.5 volts @ 8mA	2.4 volts @ -40uA	High-res HEDS
32 CPR, with index	27 / 30 mA	0.5 volts @ 8mA	2.0 volts @ -8mA	EM1
50,96, 100, 192, 200, 250, 256, 360, 400, 500, 512 CPR, with index	57 / 85 mA	0.5 volts @ 8mA	2.4 volts @ -40uA	High-res HEDS
720, 900, 1000, 1024, 1250 CPR, with index	55 / 57 mA	0.5 volts @ 8mA	2.0 volts @ -8mA	EM1

Differential Electrical

Specification	Min.	Typ.	Max.	Units	Notes
Supply	4.5	5.0	5.5	Volts	
Current Consumption - Index: 32 CPR	-	28	35	mA	No load
Current Consumption - Index: 720, 900, 1000, 1024, 1250 CPR	-	56	59	mA	No load
Current Consumption - Index: All Other Resolutions	-	58	88	mA	No load
Current Consumption - Non-index: <1000 CPR	-	18	43	mA	No load
Current Consumption - Non-index: >=1000	-	58	88	mA	No load
Output Voltage - Sourcing to +5	2.4	3.4	-	Volts	@ -20mA
Output Voltage - Sinking to Ground	-	0.2	0.4	Volts	@ 20mA

Pin-outs

5-pin Single-ended:

Pin	Description
1	Ground
2	Index
3	A channel
4	+5VDC power
5	B channel

10-pin Differential

Pin	Description
1	Ground
2	Ground
3	Index-
4	Index+
5	A- channel
6	A+ channel
7	+5VDC power
8	+5VDC power
9	B- channel
10	B+ channel

Ordering Information

HB5M -	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
	CPR		Bore		Index		Output		Housing
	32		197 =5mm		N =No Index		S =Single-ended		D =Default
	50		236 =6mm		I =Index (3rd Channel)		D =Differential		H =Hole in Housing
	96		250 =1/4"						
	100		313 =5/16"						
	110		315 =8mm						
	120								
	192								
	200								
	250								
	256								
	360								
	400								
	500								
	512								
	540								
	720								
	900								
	1000								
	1016								
	1024								
	1250								

Rules

- Index must be something other than I when CPR is 110, 120 or 540
- Index must be equal to I when CPR is 32, 720, 900 or 1250

Notes

- US Digital warrants its products against defects in materials and workmanship for two years. See complete warranty for details.

Base Pricing

Quantity	Price
1	\$164.00
10	\$147.00
50	\$132.00

100

\$120.00

- ▶ Add 8% per unit for **Output** of Differential
- ▶ Add 6% per unit for **Index** of I or **CPR** greater than or equal to 1000.