

Description

The HD25 is a rugged optical incremental shaft encoder designed for heavy-duty industrial applications. The housing, machined from a solid billet aluminum block and finished with clear anodizing, conforms to the industrial standard size 25 package. Size 25 encoders are widely used and are considered to be the backbone of feedback devices found in factory automation and industrial applications. The HD25 will drop directly into existing applications to provide a superior solution at a competitive cost. The HD25 is a factory stock product with little or no lead-time.

Typical applications include:

- Automation, robotics, motion control, elevator controls, machine tools, food processing, X-Y tables and conveyors.
- Lathes, grinders, CNC machine tools, high performance servos, test equipment, packaging machines, balance machines and cutting machines.
- Web processing, rotary tables, transfer machines, stacker cranes, press controls, printing presses and pump controls.
- Oil field equipment, saw mill machinery and construction machinery.

Our absolute encoders may be used in many stand alone applications that do not require a PC interface. For these applications we provide detailed communications protocols for all of our absolute products (see the SEI Absolute Encoder Communications Protocol page).





Features

- NEMA size 25 package
- Anodized milled aluminum housing with O-ring housing seal
- LED and phased array wide-gap monolithic encoder technology
- Tracks from 0 to 100,000 cycles/sec
- 64 to 2500 cycles per revolution (CPR)
- 400 to 10,000 pulses per revolution (PPR)
- 2 channel quadrature squarewave outputs
- Single-ended or differential outputs
- Optional index (3rd channel)
- ABEC 5 bearings

Related Products & Accessories

- CA-RC10-SH-NC 10-Pin Circular / Unterminated Shielded Cable (Base price \$60.00)
- CA-RC7-SH-NC 7-Pin Circular / Unterminated Shielded Cable (Base price \$60.00)
- CON-RC10 10-Pin Round Connector (Base price \$29.50)
- CON-RC7 7-Pin Round Connector (Base price \$29.50)

Mechanical Drawing

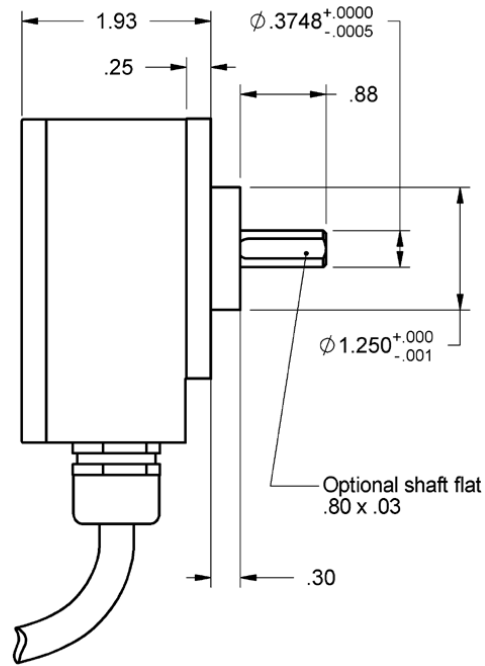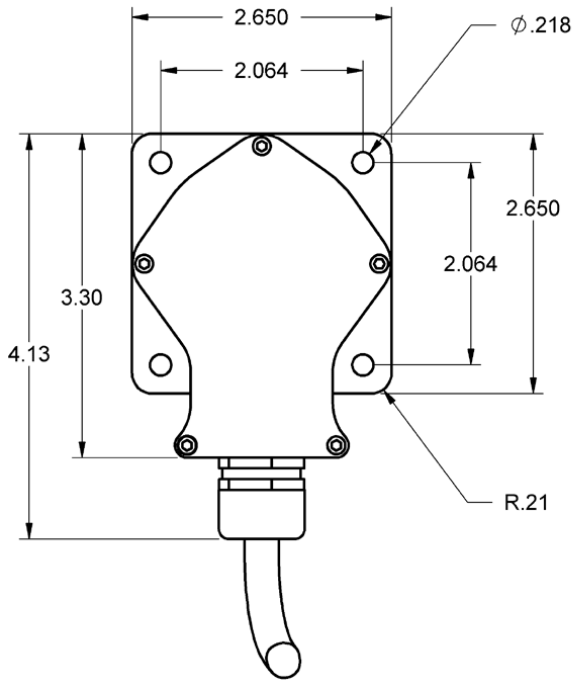

Mechanical

Size	NEMA size 25
Housing and Cover Material	Anodized aluminum
Weight	17 oz.
Shaft Material	Stainless steel
Shaft Diameter	0.3748" +0.0000" -0.0003"
Shaft Optional Flat Size	.08 in. long x .03 in. deep
Shaft Runout	≤ .0003 T.I.R.
Shaft Torque With Shaft Seal	3.5 in-oz. typical
Shaft Torque Without Shaft Seal	Less than 1/2 in-oz.
Max Axial Load	40 lbs.
Max Radial Load	35 lbs.
Bearings	ABEC 5 440 stainless steel with light preload
Bearing Life @ 4 Pound Load	2.3 x 10 ⁹ revolutions
Moment of Inertia	2.8 x 10 ⁻⁴ oz-in-sec ²
Max Acceleration	1 x 10 ⁵ rev / sec ²
Max RPM With Shaft Seal	6000 RPM
Max RPM Without Shaft Seal	6 x 10 ⁶ / CPR (limited by electronics)

Electrical

AB Output

Parameter	Min.	Max.	Units	Notes
Supply Voltage (HV Version)	9.5	32	Volts	
Supply Voltage (LV Version)	-	5.5	Volts	
Supply Current	-	110	mA	No load
Output High Voltage	2.4	-	Volts	
Output Low Voltage	-	0.8	Volts	
Output Source Current	-	30	mA	
Frequency Response	-	100	kHz	

Electrical Notes

AB Output:

Output Code	Incremental
Output Format	2 channels in quadrature
Index Width	1/4 cycle wide
Output IC	ET7272
Protection Level	Output short to ground
Illumination	LED

Environmental

Low Voltage Operating Temperature	-40 C to 100 C
High Voltage Operating Temperature	-40 C to 85 C
Storage Temperature	-40 C to 100 C
Shock	60 G's for 11 mSec
Vibration (5 to 2kHz)	20 Hz to 2000 Hz @ 20G's
Humidity With Shaft Seal	100% condensing (NEMA IP65)
Humidity Without Shaft Seal	98% non-condensing

Encoder Characteristics

- › Specifications apply over entire operating temperature range.
- › Values are for the worst error over a full rotation.


For Resolutions 2000 & 2048 with Index Only

Parameter	Symbol	Min.	Typ.	Max.	Units
Cycle Error	-	-	3.0	7.5	$^{\circ} e$
Symmetry	-	130	180	230	$^{\circ} e$
Quadrature	-	40	90	140	$^{\circ} e$
Index Pulse Width	Po	40	90	140	$^{\circ} e$
Channel I Rise after Channel B or Channel A Fall	t1	10	450	1500	ns
Channel I Fall after Channel A or Channel B Rise	t2	10	250	1500	ns

For All Remaining Resolutions

Parameter	Symbol	Min.	Typ.	Max.	Units
Cycle Error	-	-	3.0	5.5	$^{\circ} e$
Symmetry	-	150	180	210	$^{\circ} e$
Quadrature	-	60	90	120	$^{\circ} e$
Index Pulse Width	Po	60	90	120	$^{\circ} e$
Channel I Rise after Channel B or Channel A Fall	t1	-300	100	250	ns
Channel I Fall after Channel A or Channel B Rise	t2	70	150	1000	ns

AB Output Timing Diagram

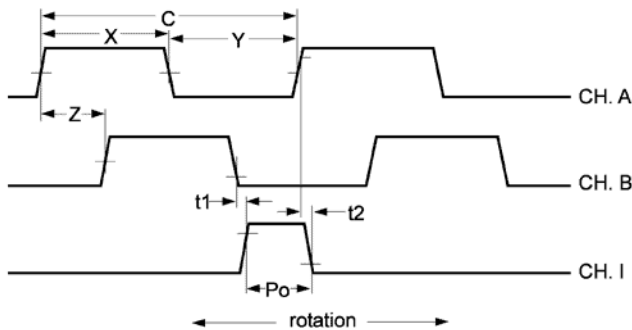

- ▶ **CPR (N):** The number of Cycles Per Revolution.
- ▶ **One Shaft Rotation:** 360 mechanical degrees, N cycles.
- ▶ **One Electrical Degree ($^{\circ} e$):** 1/360th of one cycle.
- ▶ **One Cycle (C):** 360 electrical degrees ($^{\circ} e$). Each cycle can be decoded into 1 or 4 codes, referred to as X1 or X4 resolution multiplication.
- ▶ **Symmetry:** A measure of the relationship between (X) and (Y) in electrical degrees, nominally $180^{\circ} e$.
- ▶ **Quadrature (Z):** The phase lag or lead between channels A and B in electrical degrees, nominally $90^{\circ} e$.
- ▶ **Index (CH I):** The index output goes high once per revolution, coincident with the low states of channels A and B, nominally 1/4 of one cycle ($90^{\circ} e$).


- ▶ **Position Error:** The difference between the actual shaft position and the position indicated by the encoder cycle count.
- ▶ **Cycle Error:** An indication of cycle uniformity. The difference between an observed shaft angle which gives rise to one electrical cycle, and the nominal angular increment of 1/N of a revolution.

7-pin Connector Pin-out & Cable Wire

Pin	Quad. (AB)	Low Temp. (CA7)
A	A channel	White w/ Blue stripe
B	B channel	White w/ Brown stripe
C*	Index	White w/ Orange stripe
D	+VDC	Orange w/ White stripe
E	NC	Brown w/ White stripe
F	Common	Blue w/ White stripe
G	Case ground	Green w/ White stripe

* Only available when Index channel is specified.

The 7-pin Connector




10-pin Connector Pin-out & Cable Wire

Pin	Quad. (AB)	Low Temp. (CA7)
A	A+ channel	Blue w/ White stripe
B	B+ channel	Brown w/ White stripe
C*	Index+	Orange w/ White stripe
D	+VDC	Green w/ White stripe
E	NC	Gray w/ White stripe
F	Common	White w/ Gray stripe
G	Case ground	White w/ Green stripe
H	A- channel	White w/ Blue stripe
I	B- channel	White w/ Brown stripe
J*	Index-	White w/ Orange stripe

* Only available when Index channel is specified.

The 10-pin Connector



Ordering Information

HD25 -	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
	CPR		Flat		Seal		Voltage		Index		Output
	64		N = <i>Non-Flat</i>		N = <i>Non-Sealed</i>		L = <i>Low</i>		N = <i>No Index</i>		S = <i>Single-ended</i>
	100		F = <i>Flat</i>		S = <i>Sealed</i>		H = <i>High</i>		I = <i>Index (3rd Channel)</i>		D = <i>Differential</i>
	200										
	400										
	500										
	512										
	1000										
	1024										
	1800										
	2000										
	2048										
	2500										

Rules

- Index must be equal to I when CPR is 64, 1800 or 2500

Notes

- US Digital warrants its products against defects in materials and workmanship for two years. See complete warranty for details.

Base Pricing

Quantity	Price
1	\$284.00
10	\$241.40
50	\$213.00
100	\$198.80

- Add \$45.00 per unit for **Seal** of Sealed
- Add 4% per unit for **Index** of Index (3rd Channel)
- Add 5% per unit for **Output** of Differential